

OR-UHF-7320

The Tag from orange rfid as a versatile, high-performance tag designed for a wide range of applications logistics. It performs exceptionally well on packaging materials such as corrugated cardboard and plastic transport containers.

The label size 73 x 20 mm and performance make it especially well-suited for multiple application.

ASSET TRACKING • Track high-value assets • Reduce loss and theft • Improve asset utilization	INVENTORY MANAGEMENT • Real-time stock visibility • Fast cycle counting • Reduce manual errors	SUPPLY CHAIN & LOGISTICS • End-to-end visibility • Track shipments in transit • Improve delivery accuracy	RETAIL & APPAREL • Fast inventory • Prevent stock-outs • Enhance customer experience	MANUFACTURING • Track WIP and components • Improve production efficiency • Ensure quality control
ACCESS CONTROL • Restrict area access • Track personnel and assets • Improve site security	LIBRARY MANAGEMENT • Fast book check-in/out • Locate misplaced items • Improve library efficiency	VEHICLE MANAGEMENT • Vehicle identification • Automated gate access • Improve traffic flow	HEALTHCARE • Track medical assets • Ensure patient safety • Improve compliance	COLD CHAIN MONITORING • Monitor temperature sensitive goods • Real-time data logging • Ensure product integrity

Ordering info

Part Number	IC Type	EPC Memory	USER Memory	Delivery Format
OR-UHF-7320-M8	Impinj M8	96 bits	128 bits	Dry/Wet/ Label
OR-UHF-7320-M7	Impinj M7	128 bits		Dry/Wet/ Label
OR-UHF-7320-U8	NXP U8	128 bits		Dry/Wet/ Label



Technical Specifications


Item	Specification
Frequency	860–960 MHz
RFID Protocol	EPC Class 1 Gen2v2
Standard	ISO/IEC 18000-63
Chip	IMPINJ M7/ NXP ucode 8
EPC Memory	96–496 bits
User Memory	According to chip
TID Memory	According to chip
Read Range	Up to 20 m (reader dependent)
IC Retention	50 Years
Write Cycles	100,000

Physical Specifications

Item	Specification
Label Size	73 x 20 mm
Antenna Size	70 x 17 mm
Face Material	Thermal Paper / PP / PET
Adhesive	Permanent Acrylic
Liner	Glassine Paper
Thickness	0.15 mm
Color	White
Printing	Thermal Transfer / Direct Thermal

Environmental Characteristics


Item	Value
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +85°C
Humidity	5–95% RH
IP Rating	Indoor Label

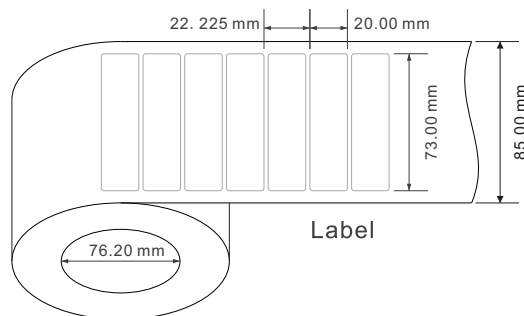

Packaging

Item	Specification
Roll Diameter	8 inch
Core Size	3 inch
Labels/Roll	2500
Carton Qty	4 rolls / box

Read Range(2WERP)

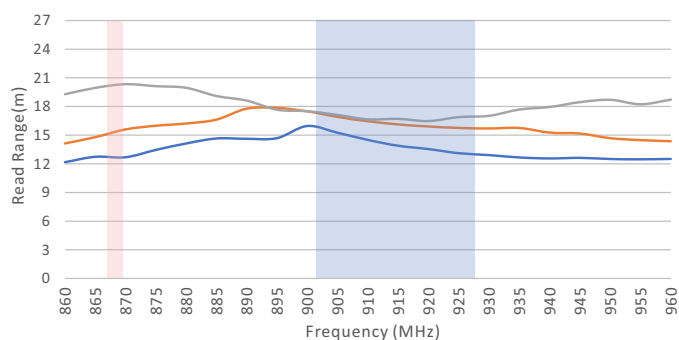

— in air — on cardboard — on PTFE



DISCLAIMER

All specifications are indicative and results may vary. Each user bears full responsibility for making its own determination as to the suitability of orange RFID products, materials, services, recommendations, or advice for its own particular use.

For intended use only. Not to be repurposed or used for other applications without prior written permission from the manufacturer.

@2026 orangerfid. All rights reserved.